

Realan[®] Black MF – PV

A quantum leap in the dyeing of black on wool



Realan[®] Black MF – PV

A quantum leap in the dyeing of black on wool

Mordant black dyes are still widely used in the market for high quality wool goods, the most common dye in this sector being the Black PV type (CI Mordant Black 9). Until now, retailers have been unable to substitute Black PV types due to their processing fastnesses used in wool finishing (potting and cross dyeing).

Even though Black PV types can be dyed without ecological and health and safety issues, textile manufacturers are pressured by retailers to avoid mordant dyes.

Moreover, dyes based on CI Reactive Black 5 are unable to reach high levels of processing requirements. They are also very red under various color sources and in addition, they provide very poor fiber coverage.

Realan[®] Black MF - PV is DyStar's perfect solution to these problems.

Features and benefits

- ☞ A completely new patented black for wool that is not based on CI Reactive Black 5
- ☞ Identical in shade and metamerism to CI Mordant Black 9 types (e.g. Black PV types)
- ☞ Wet processing fastnesses (potting, X-dyeing, hot water and milling) even better than CI Mordant Black 9 types
- ☞ Excellent fiber coverage, far superior to CI Reactive Black 5 types and even better than Mordant blacks

ECO Profile

- ☞ No MAK amines generated by reductive cleavage according to EU Directive 2002/61/EEC and German Consumer Goods Ordinance
- ☞ APEO and AOX free
- ☞ Heavy metal free
- ☞ Full compliance with Oeko-Tex[®] Standard 100
- ☞ Meets relevant Restricted Substance Lists (RSL)
- ☞ Applied for bluesign[®] approval


Realan[®] Black MF – PV

A quantum leap in the dyeing of black on wool



The shade and metamerism are identical to CI Mordant Black 9

CI Mordant Black 9

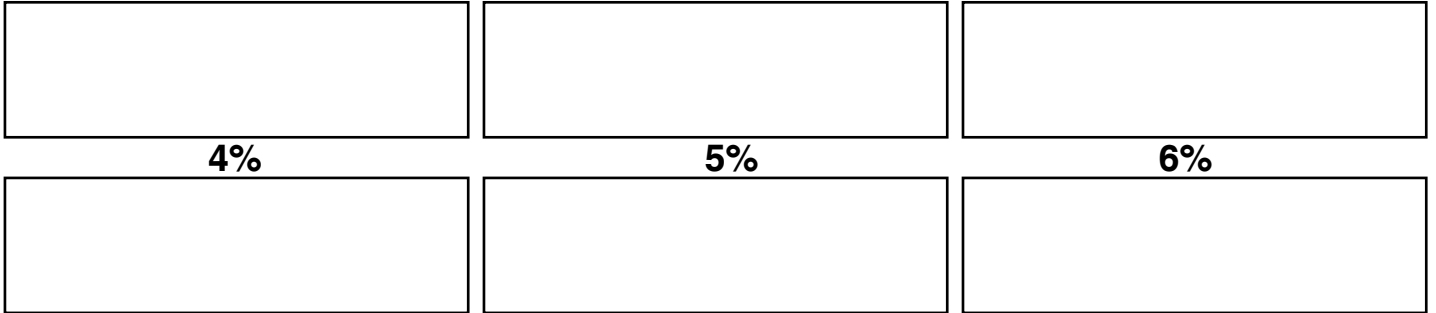

Realan® Black MF-PV


CMC shade / strength difference

4% Black PV 200% types versus 4% Realan Black MF-PV

	ΔE	ΔL	ΔC	ΔH
D65 10°	0.38	0.16	-0.24	0.25
A 10°	0.49	0.13	-0.34	0.33
F11 10°	0.46	0.13	-0.38	0.23

Dyeing Cycle

The dyeing cycle is a simple reactive dyeing process used for wool

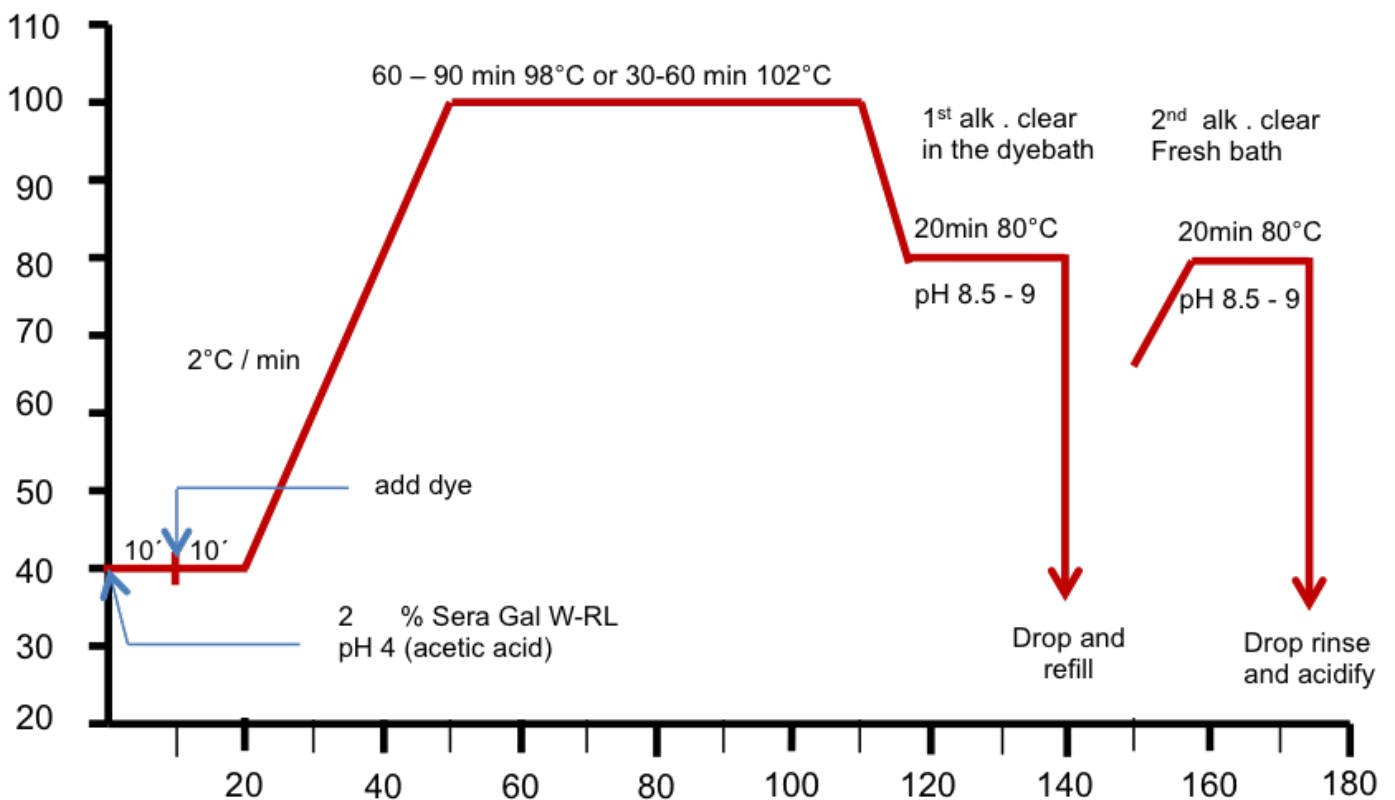

Wet fastness of Realan[®] Black MF-PV proves to be better than CI Mordant Black 9

Wet processing fastnesses (potting, X-dyeing, hot water and milling) are even better than CI Mordant Black 9 types.

Realan[®] Black MF-PV

X-Dyeing ISO 105-X07 (acetic)

Potting ISO 105-E09

4%



5%



6%



Fiber coverage

One major consideration in wool dyeing is solidity in black shades. As wool is a natural protein fiber that has been exposed to weathering during its growing cycle, it can dye skittery especially with CI Reactive Black 5 types. Furthermore, wool is often dyed in blends of various qualities that often show up in dyeing.

The illustration is a 50/50 mix of low quality coarse wool mixed together with very fine lambs wool. The fiber coverage is superb.



		Realan® Black MF-PV	Black PV types
1/1 Standard depth	% Dyestuff	4	4
Light fastness ISO 105-B02	1/1 S.D.	6	7
Fastness to water (severe)	Shade change	5	5
	Stain Wo	5	5
ISO 105-E01	Stain CO	5	5
Perspiration fastness (acid)	Shade change	5	5
	Stain Wo	5	5
ISO 105-E04	Stain CO	5	5
Perspiration fastness (alkaline)	Shade change	5	5
	Stain Wo	5	5
ISO 105-E04	Stain CO	5	5
Washing Fastness 50°C	Shade change	5	5
	Stain Wo	5	5
ISO 105-C02	Stain CO	5	5
Washing Fastness 60°C	Shade change	5	5
	Stain Wo	5	5
ISO 105-C03	Stain CO	5	5
Laundry 50°C	Shade change	5	5
	Stain Wo	5	5
ISO 105-C06 B2	Stain CO	5	5
Milling fastness alk. (severe)	Shade change	4-5	4-5
	Stain Wo	5	4-5
ISO 105-E12	Stain CO	5	4-5
Hot water fastness 70°C	Shade change	4-5	4-5
	Stain Wo	5	4-5
ISO 105-E08	Stain CO	5	4-5
Potting fastness	Shade change	4-5	4-5
	Stain Wo	4-5	4
ISO 105-E09	Stain CO	4-5	4-5
Cross dyeing (acetic)	Shade change	4-5	4-5
	Stain Wo	4-5	4-5
ISO 105-X07	Stain CO	5	3-4
Carbonising neutralised	Shade change	4-5	4-5
ISO 105-X02			
Decatising (severe)	Shade change	4-5	4-5
ISO 105-E10			
Rubbing dry/wet	Dry	4-5	4-5
ISO 105-X12	Wet	3	3

Committed to Sustainability.

At DyStar, our products and services help customers worldwide reduce costs, shorten lead times and meet stringent quality and ecological specifications.



Information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.



Sera / Realan / are trade marks of DyStar Colours Distribution GmbH
 bluesign is a trade mark of bluesign technologies ag.
 Oeko-Tex is a trademark of Forschungsinstitute Hohenstein.

Global Headquarters
DyStar Singapore Pte Ltd
 Tel: +65 66 71 28 00 Fax: +65 66 59 13 28 DyStar.Singapore@DyStar.com
www.DyStar.com

